



LED Emergency Exit Sign Light


LCD Backlight Module And Super-thin Size

Characters:

- ▶ **Super-Thin Design** - High quality anodized aluminum alloy frame; 20-mm maximum thickness; light and elegant with attractive appearance.
- ▶ **Common light Design** - A common light for wall-hang/ Ceiling-hang/ Ceiling-suspend. Only installation of additional parts is required.
- ▶ **Fixed Voltage switching power** - Back-up power when discharged, Variation of light intensity is within 5% in 60 minutes.
- ▶ **Advanced Opt guide** - Same opt guide technology as the LCD show super high intensity and the average light intensity is above 80%.
- ▶ **High Efficiency Ni-MH Battery** - Highly efficient, long life and rechargeable for 500 times. 18-hour charging time for provision of 90-minute operation.
- ▶ **Lead in the Industry** - SMD-TYPE LED Automatic Process with a stable quality. Long life and energy-saving.
- ▶ **Alarm** - Optional Power Outage Alarm.



Customize Panels

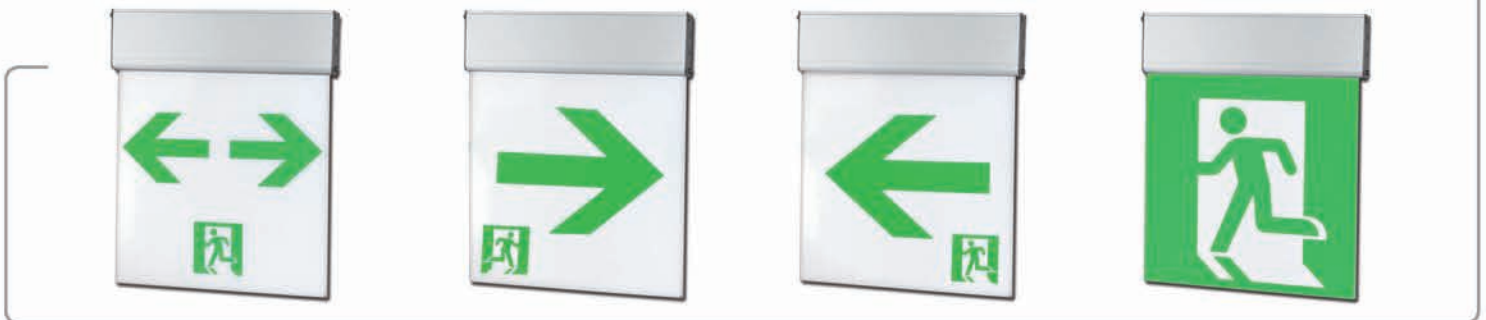

● Specification: Operating Voltage: 90V ~ 245V

	Model No.	LED Spec	Ni-MH Battery	Size (mm)	Power Rating	Energy Consumption
Small	LE-BC/ LD-BC Double side: LD-BCD	SMD White LED 0.07W	3.6V 350mA	157x1187x20 Sign:132x132	Voltage 90V-245V Current 73mA	1.7W
Medium	LE-BB/ LD-BB Double side:LD-BBD	SMD White LED 0.07W	3.6V 800mA	205x255x20 Sign:200x200	Voltage 90V~245V Current 115mA	3.7W
Large	LE-BA/ LD-BA Double side:LD-BAD	SMD White LED 0.07W x 2	3.6V 1700mA	405x255x20 Sign:400x400	Voltage 90V~245V Current 224mA	10.2W